

# BATTERY PACK BAJ1 / BAJ2

## Features:

- *Functional and elegant design*
- *High battery capacity: 24 V DC, 1 x 2.9 Ah  
(Approx. 40 lifts: normal speed, Thrust 6000 N,  
duty cycle 10% or 2 min. continuous use then  
18 min. not in use, 200 mm stroke)*
- *Protection class: IP 65 - only for BAJ1. Protection  
class IP X1 - only for BAJ2.*
- *DC-socket for charging of the battery pack,  
(only BAJ2) by means of the CH08 wall charger  
(not medically approved)*
- *Approved according to EN 60601-1, CAN/CSA-  
C22.2 No. 601.1-M90 and UL 2601 (Medically  
approved)*
- *Ambient temperature: +5° to +40° C*
- *Colour: Bottom charcoal grey (RAL 7016) and  
top pale grey (RAL 7035)*

## Options:

- *Colour: pale grey bottom (RAL 7035)*
- *Customised front cover*
- *Battery cover (the battery cannot be dismounted  
by unauthorized persons. A holder for the mains  
cable when this is not in use)*
- *DC socket for charging of the battery by means  
of the CH08 wall charger (not medical approved)  
- only for BAJ2.*



These battery packs have been specially developed for use with the JUMBO system.


The battery packs are easy to exchange through an integrated snap system.

The battery packs are medically approved as a part of the JUMBO system according to EN 60601-1, CAN/CSA-C22.2, No. 601-1-M90 and UL 2601-1 easy mounting of the battery pack on the JUMBO mounting brackets.

Customised front cover possible.

BAJ1 has to be charged with a JUMBO charger CHJ2 or a JUMBO control box CBJ1 or CBJ2 with integrated charger.


BAJ2 can be charged as BAJ1, but can also be charged through an integrated DC-plug for use with charger CH08.

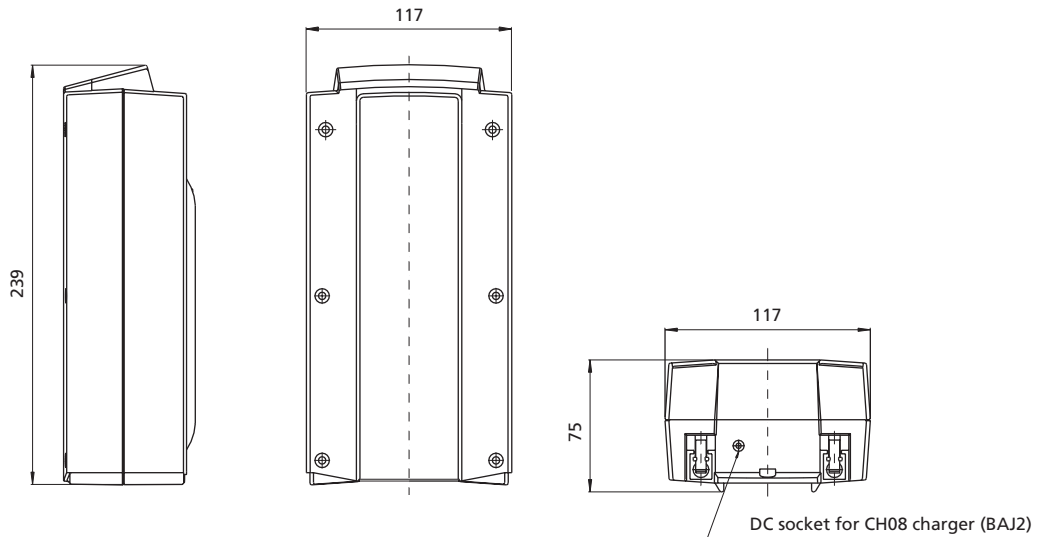

LINAK A/S  
BAJ002B

## BAJ1 / BAJ2

Ordering example:

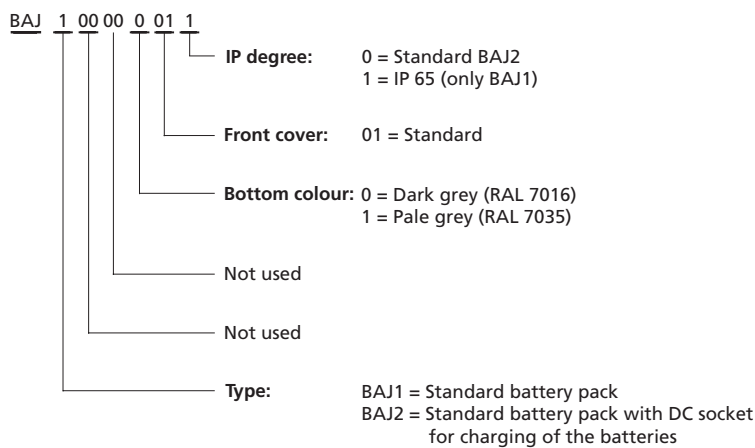

Specifications subject to change without prior notice.

It is the responsibility of the product user to determine the suitability of LINAK A/S products for a specific application. LINAK will at point of delivery replace/repair defective products covered by the warranty if promptly returned to the factory. No liability is assumed beyond such replacement/repair.